

# 07 VITRINA EXPOSITORA FRÍO VENTILADO CON RESERVA SERIE MARBELLA


## REFRIGERATED WITH STORAGE DISPLAY CASE MARBELLA SERIES




VMB 9 R




VMB 12 R



VMB 15 R




VMB 18 R



VMB 25 R



VMB 15 R

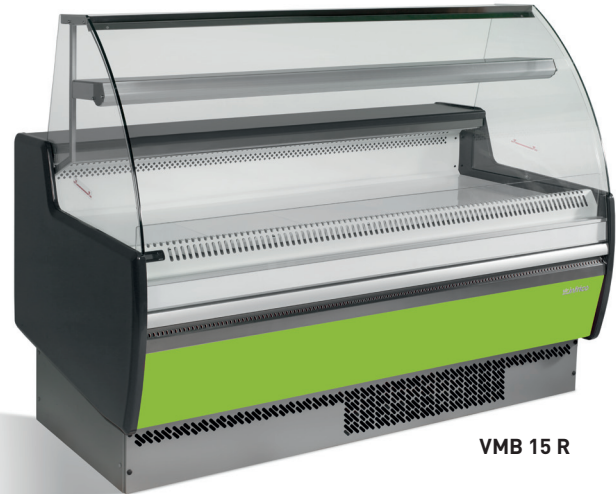

VMB 15 R

### EXTERIOR

- Chapa de acero plastificada
- Cristal curvo securizado (R)
- Cristal recto securizado (RP)
- Bancada en acero esmaltado
- Claro de puerta de acceso media reserva 445x265

### INTERIOR

- Chapa de acero plastificada
- Plano de exposición en acero esmaltado
- Iluminación LED plano de exposición

### AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m<sup>3</sup>, bajo GWP y cero efecto ODP

### REFRIGERACIÓN

- Sistema de condensación ventilada
- Control temperatura final del desescarche
- Bandeja evaporativa automática
- Clase climática 4

### EXTERIOR

- Laminated steel plate
- Curved tempered security glass system (R)
- Flat tempered security glass system (RP)
- Enamelled steel base
- Storage door opening 445x265

### INTERIOR

- Laminated steel plate
- Enamelled exhibition steel surface
- Upper profile LED lighting for exhibition surface

### INSULATION

- Free CFC's high density (40kg/m<sup>3</sup>) polyurethane insulation with low GWP & zero ODP effect


### REFRIGERATION

- Forced air refrigeration system
- Control of the final defrost temperature
- Automatic evaporative tray
- Climatic class 4


MODELOS MODELS	→	↗	↑	⏻	⚡	📦	📱	📺	☰	🔧	🛒	💧	🌡️	❄️	🔧	📺	🌡️
	Dimensiones sin costados Dimensions without sides LxPxH (mm)	Costados Sides (2)(mm)	Potencia Power (W)	Electrica Electrical (W/Hz)	Capacidad Capacity (L)	Puertas Doors	Superficie exposición (m <sup>2</sup> )	Estantes Shelving	Compresor Compressor (HP)	Consumo Consumption (kWh/24h)	Evaporación Evaporation	Régimen T <sup>RA</sup> 30°C/55% H.R	Potencia frigorífica Refrigerating power (W a -10°C)	Desescarche Defrost	Control Control	Refrigerante Refrigerant	
VMB 9 R VMB 9 RP	938x953x1300/1315	30+30	700	220/50	103	1	0,62	1	1/2	9,8	Forzada Forced	0°C/+6°C	545	Automático Automatic	Digital	R 404 A	
VMB 12 R VMB 12 RP	1250x953x1300/1315	30+30	950	220/50	138	2	0,83	1	5/8	13,3	Forzada Forced	0°C/+6°C	676	Automático Automatic	Digital	R 404 A	
VMB 15 R VMB 15 RP	1562x953x1300/1315	30+30	1000	220/50	172	2	1,03	1	3/4	14,0	Forzada Forced	0°C/+6°C	1096	Automático Automatic	Digital	R 404 A	
VMB 18 R VMB 18 RP	1875x953x1300/1315	30+30	1230	220/50	206	3	1,24	1	1	17,2	Forzada Forced	0°C/+6°C	1315	Automático Automatic	Digital	R 404 A	
VMB 25 R VMB 25 RP	2500x953x1300/1315	30+30	1460	220/50	275	4	1,65	1	1+1/6	20,4	Forzada Forced	0°C/+6°C	1506	Automático Automatic	Digital	R 404 A	

Características técnicas y constructivas sujetas a variación sin previo aviso / We reserve the right to change specifications without prior notice.


**VITRINA EXPOSITORA FRÍO VENTILADO CON RESERVA SERIE MARBELLA**  
 REFRIGERATED WITH STORAGE DISPLAY CASE MARBELLA SERIES




VMB 9 RP




VMB 12 RP



VMB 15 RP




VMB 18 RP




VMB 25 RP




VMB 9 RP

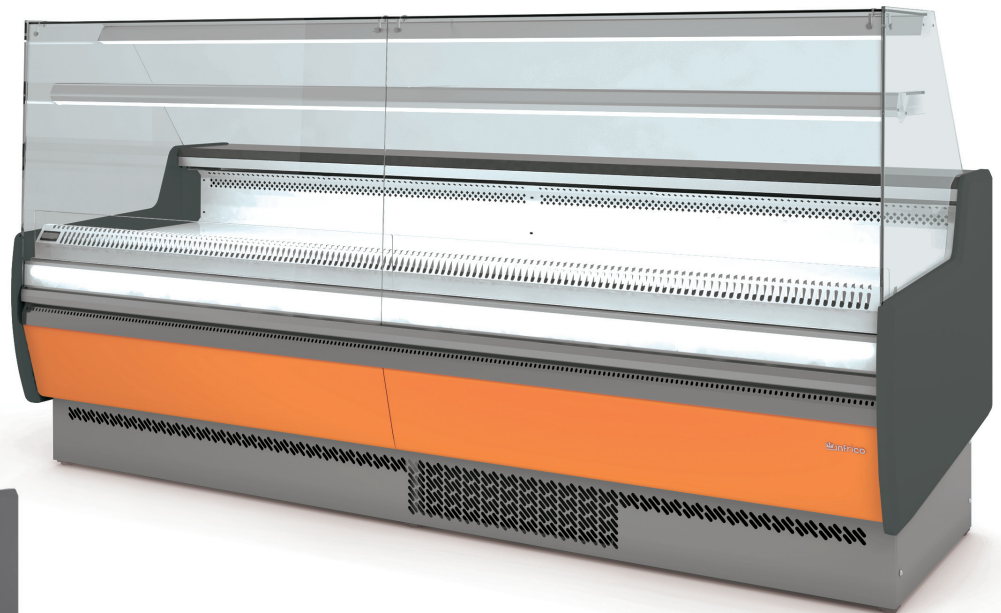


VMB 25 RP

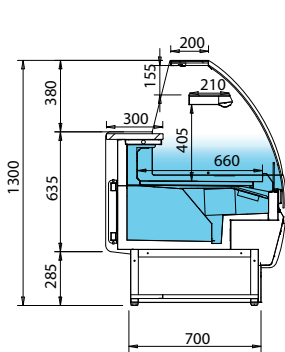

VMB R

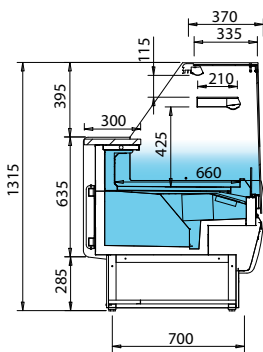

VMB RP

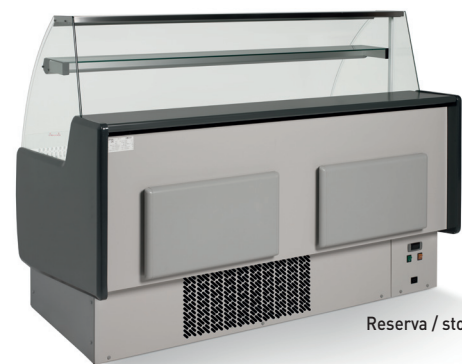

Reserva / storage

**OPCIONAL / OPTIONAL**

MODELOS MODELS	Puertas correderas traseras Rear sliding doors	Luz LED decoración frontal Frontal decoration LED lighting	Luz LED estante LED lighting shelf
VMB 9	(PUEVMB9CT)	(ILUDECVMBC9)	(ILUESTVMBC9)
VMB 12	(PUEVMB12CT)	(ILUDECVMBC12)	(ILUESTVMBC12)
VMB 15	(PUEVMB15CT)	(ILUDECVMBC15)	(ILUESTVMBC15)
VMB 18	(PUEVMB18CT)	(ILUDECVMBC18)	(ILUESTVMBC18)
VMB 25	(PUEVMB25CT)	(ILUDECVMBC25)	(ILUESTVMBC25)