

Armario GN 2/1, refrigeración con departamento de congelados

GN 2/1 cabinet, chiller with door for freezer




AGM-752



AGM-1003



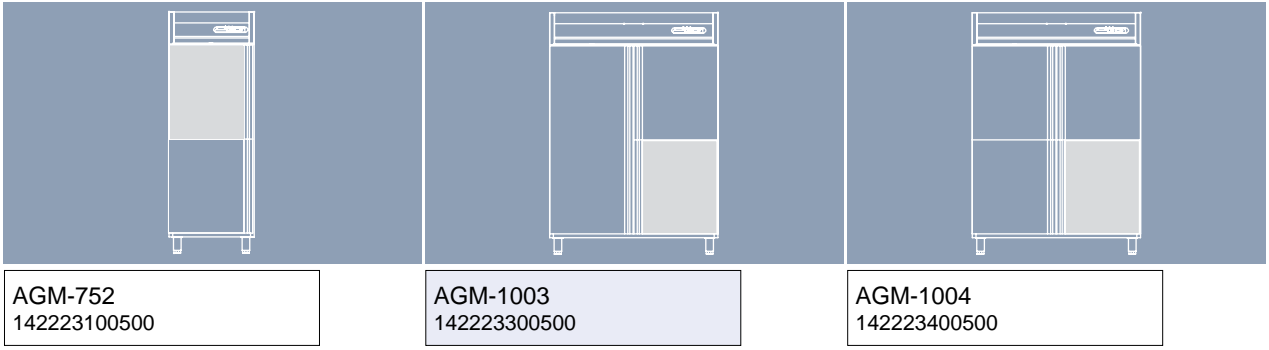

Características Técnicas

Technical Data

REF.	LARGO LENGHT	ALTO HEIGHT	FONDO DEPH	POTENCIA FRIG FRIG POWER	CONSUMO CONSUMPTION	CAPACIDAD CAPACITY	PESO NETO NET WEIGHT	ESTANTES SHELVES	PAIRES DE GUIAS SET OF SLIDES	PUERTAS PEQ. SMALL DOORS	PUERTAS GRA. LARGE DOORS	TENSIÓN MONOFÁSICA SINGLE PHASE VOLTAGE	REFRIGERANTE COOLANT
AGM-752	695 mm	2010 mm	830 mm	300 W	485 W	280 L	146 Kg	1 ud	1	2	0	220 V - 50/60 Hz	R-134a
AGM-1003	1390 mm	2010 mm	830 mm	560 W	550 W	1050 L	200 Kg	4 ud	4	2	1	220 V - 50/60 Hz	R-134a
AGM-1004	1390 mm	2010 mm	830 mm	560 W	550 W	1050 L	200 Kg	4 ud	4	2	2	220 V - 50/60 Hz	R-134a
DPTO. MANTENIMIENTO DE CONGELADOS MAINTENANCE OF FROZEN				300 W	550 W	280 L		3 containers				220 V - 50/60 Hz	R-404a

Características Técnicas

Characteristics

- Exterior en acero inox AISI-304 18/10, excepto el respaldo.
- Interior en acero inox AISI-304 18/10, con aristas curvas -AISI-304.
- Puertas con sistema de cierre automático y burlete magnético, la puerta permanece abierta al superar los 90° de apertura, reversible.
- Luz interior.
- Estantes interiores de alambre en acero plastificado, regulables en altura.
- Pies en tubo de acero inox ajustables en altura 125 - 200 mm.
- Cuadro de mandos y rejilla ventilación motor, desmontable.
- Unidad condensadora ventilada.
- Evaporador sistema tiro forzado, con recubrimiento anticorrosión.
- Evaporación automática del agua de descarche.
- Aislamiento de poliuretano inyectado, libre de CFCs, densidad 40 Kg.
- Temperatura de trabajo: -2° +8° a 32° temperatura ambiente.
- Control digital de temperatura y descarches.

DEPARTAMENTO MANTENIMIENTO DE CONGELADOS

Evaporador ventilado.

Motor independiente.

Temperatura de trabajo: -15° -20° a 32° ambiente.

3 cajones de plástico sobre guías inox.

- AISI-304 18/10 stainless steel exterior, except rear panel.
- AISI-304 18/10 stainless steel interior with sanitary edges.
- Doors with automatic closing system and magnetic gasket, door stays open when opening over 90°, reversible.
- Internal lighting.
- Height-adjustable plastic coated steel wire shelves.
- Adjustable 125 - 200 mm tubular stainless steel feets.
- Detachable switch panel and ventilating motor grille.
- Ventilated condenser unit.
- Forced draught system evaporator with corrosion-resistant coatin.
- Defrost water automatic evaporation.
- Injected polyurethane insulation, CFC friendly , 40 kg in density.
- Working temperature: -2° +8° at 32° ambient temperature.
- Temperature and deforst digital control.

MAINTENANCE OF FROZEN DOOR

Pulsed air evaporator.

Independent engine.

Working temperature: -15° -20° at 32° ambient temperature.

3 plastic containers with stainless steel slides.

OPCIONES

OPTIONS

- Cerraduras
- Ruedas

- Barras carniceras
- Registro alarma HACCP

- Locks
- Castors

- Butcher's bars
- HACCP alarm recorder